


### NATIONWIDE PROTECTIVE COATING MFRS., INC. The PERManent Coating Solution™

**ENERGY** STAR<sup>®</sup> **COATINGS** 

# **NATIONWIDE PROTECTIVE COATING MFRS., INC.,** is a PROUD PARTNER in the **EPA ENERGY STAR® ROOF PRODUCTS PROGRAM**

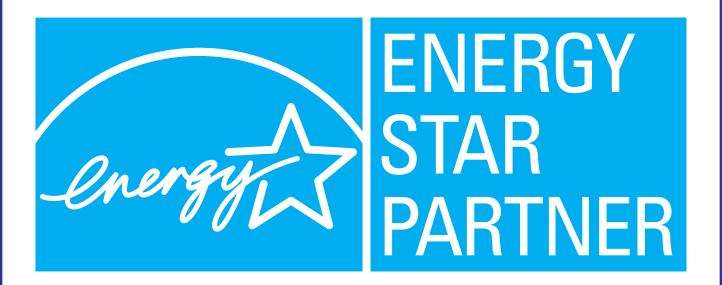

As an ENERGY STAR® Roof Products Partner, Nationwide has determined that our Insulating Ceramic Reflective Elastomeric Coatings are compliant with and meet or exceed the ENERGY STAR® quidelines for energy efficiency.

Nationwide's Elastomeric Roof Coatings reflect up to 95% of the sun's solar radiation, reducing interior heat gain, which results in lower energy consumption and utility bills and increased personal comfort.

Our Roof Coatings have the added benefits of insulating, waterproofing and protecting. This results in lower maintenance costs and extends the life of the roof.

All Nationwide's Roof Coatings are produced using the highest quality raw materials and are covered by a Limited Material Manufacturers Warranty.

The ENERGY STAR® Logo is the symbol for Energy Efficiency, look for it on our products.

"The ENERGY STAR® Name and International ENERGY STAR® Logo are registered trademarks of the U.S. Government"

All Information presented herein has been compiled from sources to be reliable, and is accurate and reliable to the best of our knowledge and beliefs, but is not guaranteed to be so. Revised: 02/14/1

e-mail: info@natcoat.net



## NATIONWIDE PROTECTIVE COATING MFRS., INC. **The PERManent Coating Solution™**

**ENERGY** STAR<sup>®</sup> **COATINGS** 



When installed properly, these products can help reduce energy costs. Actual savings will vary based on geographic location and individual building characteristics. Consult your Product Manufacturer, Roofing Contractor, or call the EPA's ENERGYSTAR® Hotline at 1-888-STAR-YES (1-888-782-7937) for

# Products Compliant with and Meeting or Exceeding the **ENERGY STAR®** guidelines for Energy Efficiency:

**7030 INSULKOTE™** 7550 PERMAKOTE SEMI-GLOSS®

7520 PERMA1KOTE® 7020 SNOWBRITE™

7522 PERMAGARD® 4030 ULTRA KOTE XL™

7525 PERMAKOTE® 4025 ULTRA KOTE™

7530 PERMAKOTE PLUS® 2725 ULTRA SEAL™

#### Emittance:

Product	Reflectance Measured	Near-Normal Emittance Calculated	Hemispherical Emittance Calculated
INSULKOTE™	.06	.94	.89
PERMA1KOTE®	.06	.94	.89
PERMAGARD <sup>®</sup>	.06	.94	.89
PERMAKOTE®	.07	.93	.88
PERMAKOTE PLUS®	.06	.94	.89
PERMAKOTE SEMI-GLOSS®	.06	.94	.90
SNOWBRITE™	.06	.94	.89
ULTRA KOTE XL™	.07	.93	.88
ULTRA KOTE™	.06	.94	.89
ULTRA SEAL™	.08	.92	.87

### Reflectance:

Product	% Reflectance	(SRI) Solar Reflectance Index
INSULKOTE™	.81	101
PERMA1KOTE®	.84	106
PERMAGARD <sup>®</sup>	.85	107
PERMAKOTE®	.85	107
PERMAKOTE PLUS®	.81	101
PERMAKOTE SEMI-GLOSS®	.86	109
SNOWBRITE™	.84	106
ULTRA KOTE XL™	.82	103
ULTRA KOTE™	.83	104
ULTRA SEAL™	.82	102

All Information presented herein has been compiled from sources to be reliable, and is accurate and reliable to the best of our knowledge and beliefs, but is not guaranteed to be so. Revised: 02/14/17

e-mail: info@natcoat.net